

# C750-100 Precision Fluid Damped Tiltmeter

## 4-20 mA Output



Making Sense out of Motion...

The **750-100 Series** Tiltmeter is a rugged, high performance, single-axis tilt sensor designed for peak performance in extreme conditions. The fluid damped mechanism delivers superior noise rejection in high shock and vibration environments as well as excellent output stability. Units are available with a 6-pin connector or pin-terminals. Available outputs include 0-5V and 4-20mA. Custom input ranges, filters and temperature compensation are also available on request.

### Features

- *Resolution of 1  $\mu$ rad*
- *Temperature Compensation Available*
- *4-20 mA Output*
- *+20 to +30 Volts DC Power Input*
- *RoHS Compliant*


### Applications

- *High-precision Geotech*
- *Oil and Gas, Riser Tilt Monitoring*
- *Railroad MOW Equipment*
- *Pavement Profiling Rigs*
- *Vehicle Wheel Alignment*
- *Robotics*




#### Connector Version

| PIN | FUNCTION       |
|-----|----------------|
|     | 4-20 mA OUTPUT |
| A   | + VDC          |
| B   | PWR / SIG COM  |
| C   | N/C            |
| D   | SIG OUT        |
| E   | N/C            |
| F   | N/C            |



#### Pin Terminal Version

| PIN | FUNCTION       |
|-----|----------------|
|     | 4-20 mA OUTPUT |
| A   | + VDC          |
| B   | N/C            |
| C   | PWR / SIG COM  |
| D   | SIG OUT        |



# C750-100 Precision Fluid Damped Tiltmeter

## 4-20 mA Output



Making Sense out of Motion...

### STATIC/DYNAMIC

|  |         |         |         |         |         |         |
|--|---------|---------|---------|---------|---------|---------|
| Input Range (deg.)                             | ±1      | ±3      | ±14.5   | ±30     | ±60     | ±90     |
| Full Range Output (mA) <sup>1</sup>            | 4-20    | 4-20    | 4-20    | 4-20    | 4-20    | 4-20    |
| Non-linearity (% FRO) <sup>2</sup>             | 0.05    | 0.03    | 0.03    | 0.03    | 0.03    | 0.05    |
| Scale Factor (mA/g nom.)                       | 458.4   | 152.9   | 32.0    | 16.0    | 9.2     | 8.0     |
| Scale Factor Sensitivity (PPM/°C max)          | 350     | 300     | 100     | 60      | 60      | 60      |
| Bandwidth, Hz (-3 dB)                          | 0.5     | 2       | 15      | 20      | 30      | 30      |
| Transverse Axis Misalignment (° max)           | ±0.25   | ±0.25   | ±0.5    | ±0.5    | ±0.5    | ±0.5    |
| 0° Output nominal (mA)                         | 12 ±0.6 | 12 ±0.6 | 12 ±0.3 | 12 ±0.3 | 12 ±0.3 | 12 ±0.3 |
| 0° Output Temp. Sensitivity (mA/°C max)        | 0.024   | 0.01    | 0.002   | 0.001   | 0.001   | 0.0008  |
| Resolution & Threshold (µradians) <sup>3</sup> | 1       | 1       | 1       | 1       | 1       | 1       |

<sup>1</sup>Full Range is defined "from negative full input angle to positive full input angle." <sup>2</sup>Nonlinearity is specified as deviation of output referenced to theoretical sine function value, independent of misalignment. <sup>3</sup>Full Resolution is achieved with noise reduction techniques.

### ELECTRICAL

|                             |            |
|-----------------------------|------------|
| Number of Axes:             | 1          |
| Input Voltage Range, (VDC): | +20 to +30 |
| Input Current, mA, max:     | 40         |
| Noise, µArms, maximum:      | 0.002      |
| Mass (grams)                | 230        |

### ENVIRONMENTAL

|                       |                         |
|-----------------------|-------------------------|
| Operating Temp Range: | -40°C to +80°C          |
| Storage Temp Range:   | -60°C to +90°C          |
| Shock:                | 1500g, 0.5 msec, ½ sine |

### ENCLOSURE

|       |      |
|-------|------|
| Seal: | IP65 |
|-------|------|


# C750-100 Precision Fluid Damped Tiltmeter 4-20 mA Output



**Jewell**  
Instruments

Making Sense out of Motion...

## Outline Drawing: Connector Version

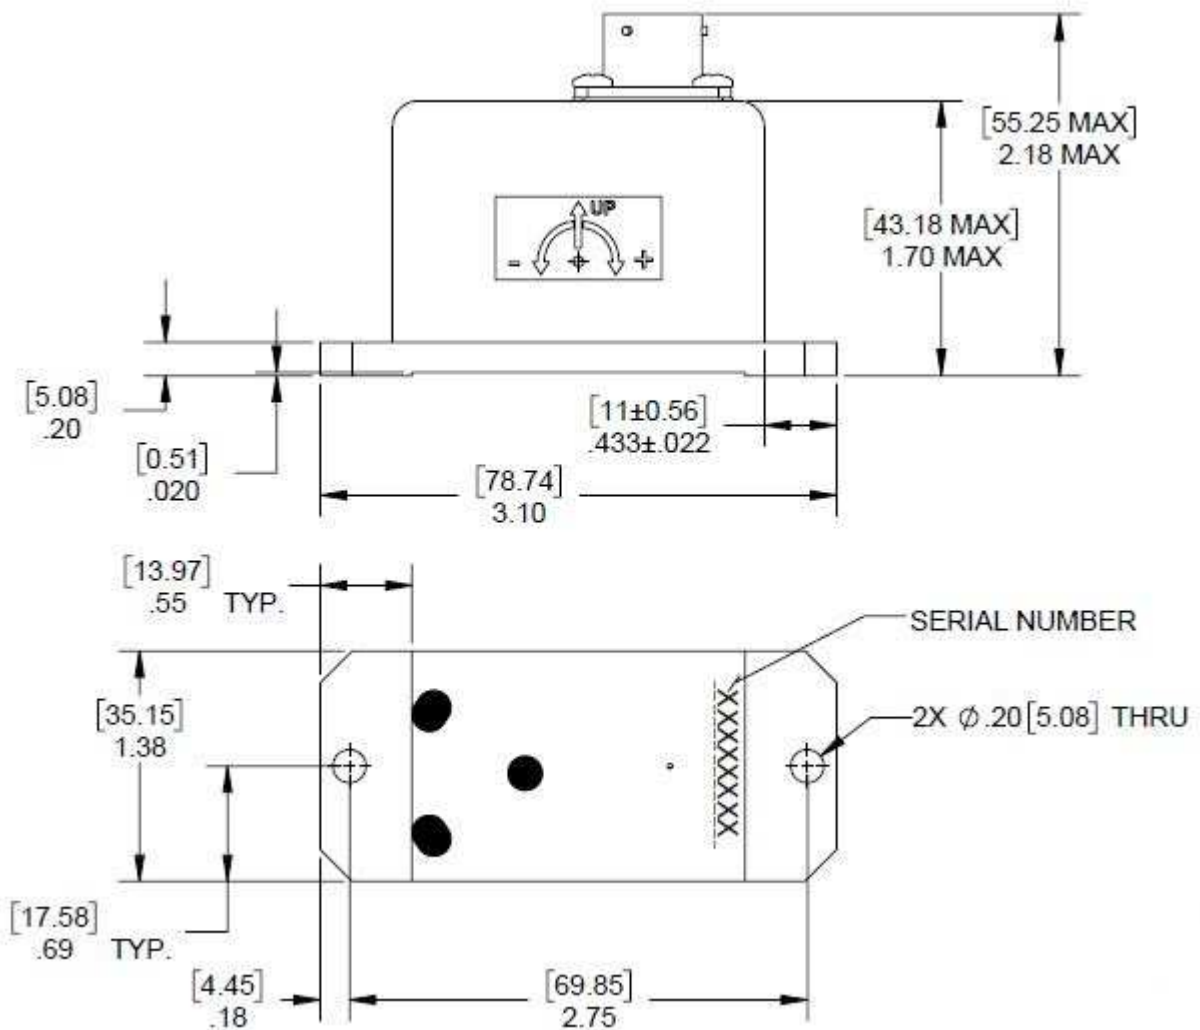


# C750-100 Precision Fluid Damped Tiltmeter 4-20 mA Output



**Jewell**  
Instruments

Making Sense out of Motion...

## Outline Drawing: Pin Terminal Version

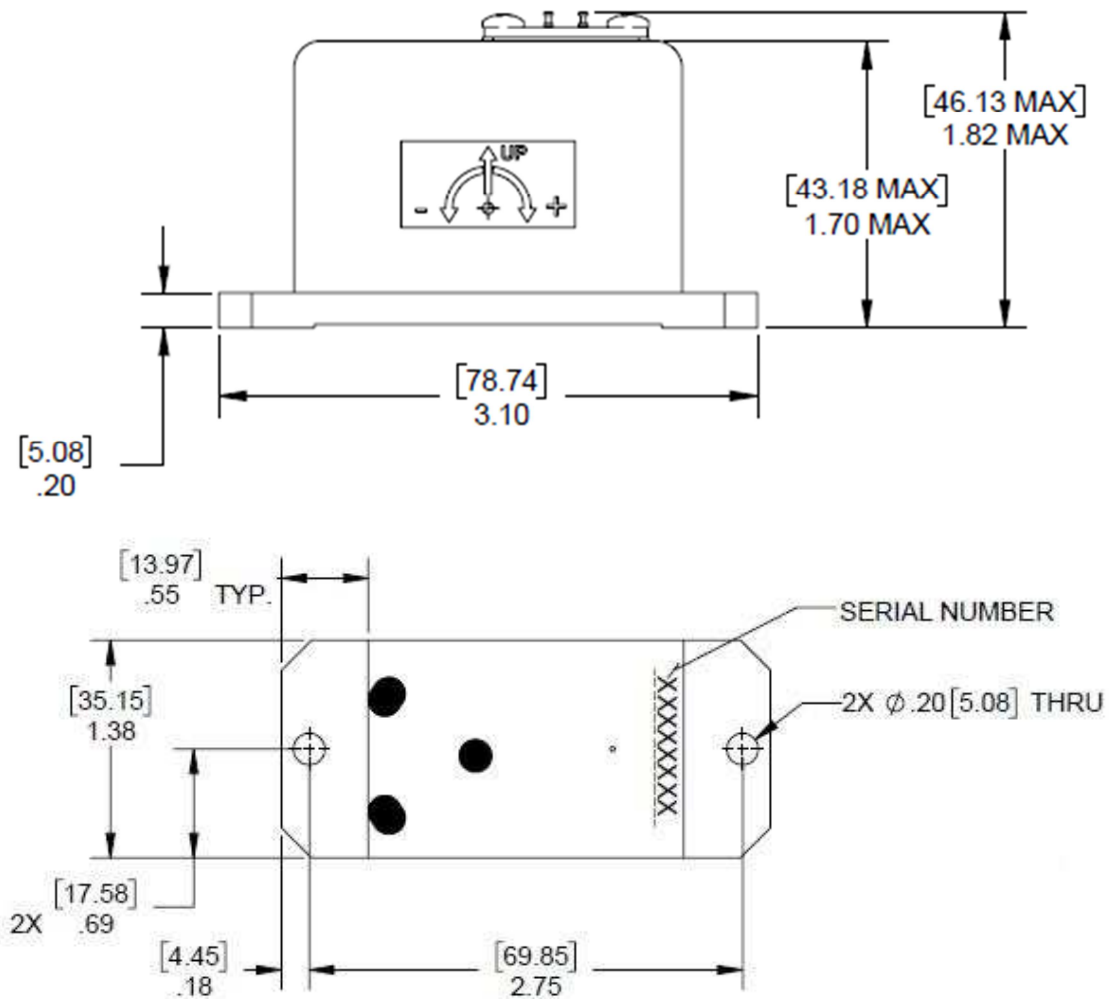


# C750-100 Precision Fluid Damped Tiltmeter

## 4-20 mA Output



Making Sense out of Motion...

### How to Order

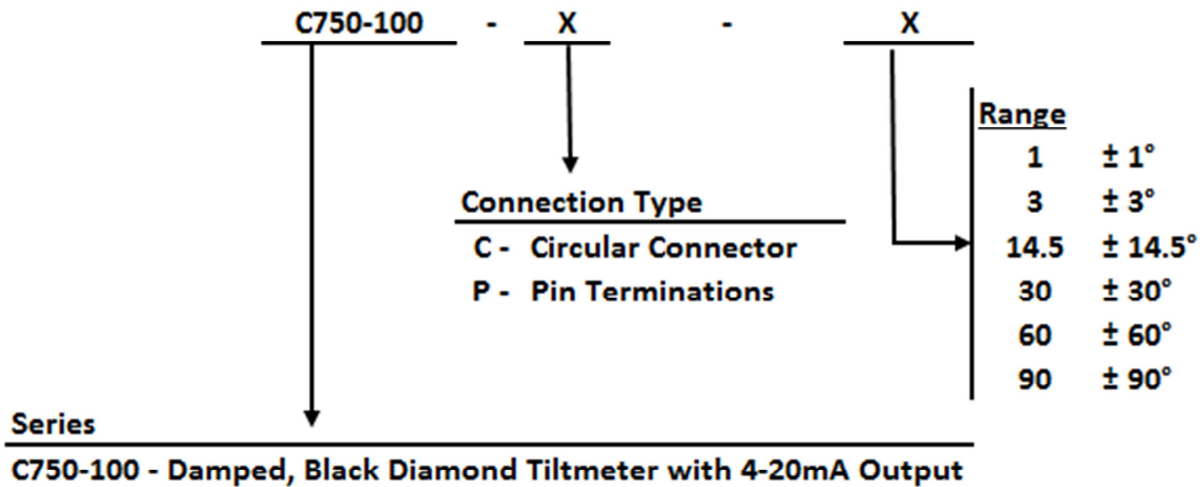

Example:

C750-100-C-1

4-20mA output, damped, circular connector & ±1° range

### Accessories

#### Mating Connector

| Description              | Part Number  |
|--------------------------|--------------|
| Standard 6-pin connector | 62101011-001 |

#### Cable Assemblies\*

| Description | Part Number |
|-------------|-------------|
| 6 Ft Cable  | 879605-001  |
| 10 Ft Cable | 879605-002  |
| 2 M Cable   | 879605-007  |
| 3 M Cable   | 879605-008  |

\*All cable assemblies come with mating connector