

LSOX-SCE Precision Fluid Damped Inclinometer

0-5V DC Output – CE Marked




Making Sense out of Motion...

The LSOX Series Inclinometer is a rugged, high performance, single-axis, **CE marked**, tilt sensor designed for peak performance in extreme conditions. The fluid damped mechanism delivers superior noise rejection in high shock and vibration environments as well as excellent output stability. Units are available with a 6-pin connector, pin-terminals or flying leads. Available outputs include +/-5V, 0-5V and 4-20mA. Custom input ranges, filters and temperature compensation are also available on request.



Features

- *Extremely Rugged*
- *High Accuracy*
- *Temperature Compensation Available*
- *0-5Vdc Output*
- *+9 to +18 Volts DC Power Input*
- *RoHS Compliant*
- *CE Marked*



Applications

- *High-precision Geotechnical*
- *Oil and Gas/Riser Tilt Monitoring*
- *Railroad MOW Equipment*
- *Pavement Profiling Rigs*
- *Vehicle Wheel Alignment*
- *Robotics*

PIN	FUNCTION
A	POWER IN
B	COMMON
C	N/C
D	SIGNAL OUT
E	N/C
F	N/C



LSOX-SCE Precision Fluid Damped Inclinometer

0-5V DC Output – CE Marked



Making Sense out of Motion...

STATIC/DYNAMIC

Input Range (deg.)	±1	±3	±14.5	±30	±60	±90
Full Range Output (VDC) ¹	0-5	0-5	0-5	0-5	0-5	0-5
Non-linearity (% FRO) ²	0.05	0.02	0.02	0.02	0.02	0.05
Scale Factor (V/g nom.)	143.2	47.8	10.0	5.0	2.9	2.5
Scale Factor Sensitivity (PPM/°C max)	350	300	100	60	60	60
Bandwidth, Hz (-3 dB)	0.5	2	15	20	30	30
Transverse Axis Misalignment (° max)	±0.25	±0.25	±0.5	±0.5	±0.5	±0.5
0° Output nominal (mA)	±0.10	±0.04	±0.02	±0.02	±0.02	±0.02
0° Output Temp. Sensitivity (V/°C max)	0.015	0.005	0.001	0.0005	0.0004	0.0003
Resolution & Threshold (μradians) ³	1	1	1	1	1	1

¹Full Range is defined "from negative full input angle to positive full input angle." ²Nonlinearity is specified as deviation of output referenced to theoretical sine function value, independent of misalignment. ³Full Resolution is achieved with noise reduction techniques.

ELECTRICAL

Number of Axes:	1
Input Voltage Range, (VDC):	+9 to +18
Input Current, mA, max:	40
Noise, μArms, maximum:	0.002
Output Impedance (ohms)	1
Mass (grams)	370


ENVIRONMENTAL

Operating Temp Range:	-40°C to +80°C
Storage Temp Range:	-60°C to +90°C
Shock:	1500g, 0.5 msec, ½ sine

ENCLOSURE

Seal:	IP66
-------	------

Order Code

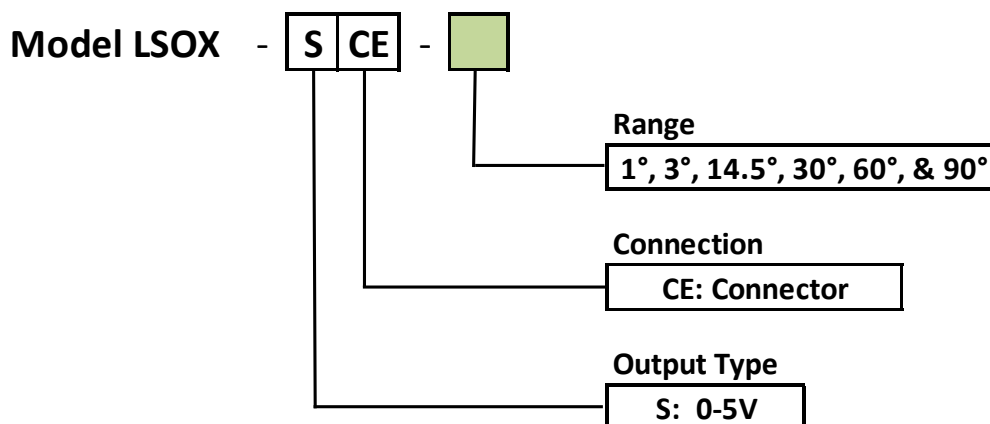

LSOX-SCE Precision Fluid Damped Inclinometer

0-5V DC Output – CE Marked



Making Sense out of Motion...

Outline Drawing: Connector Version

