
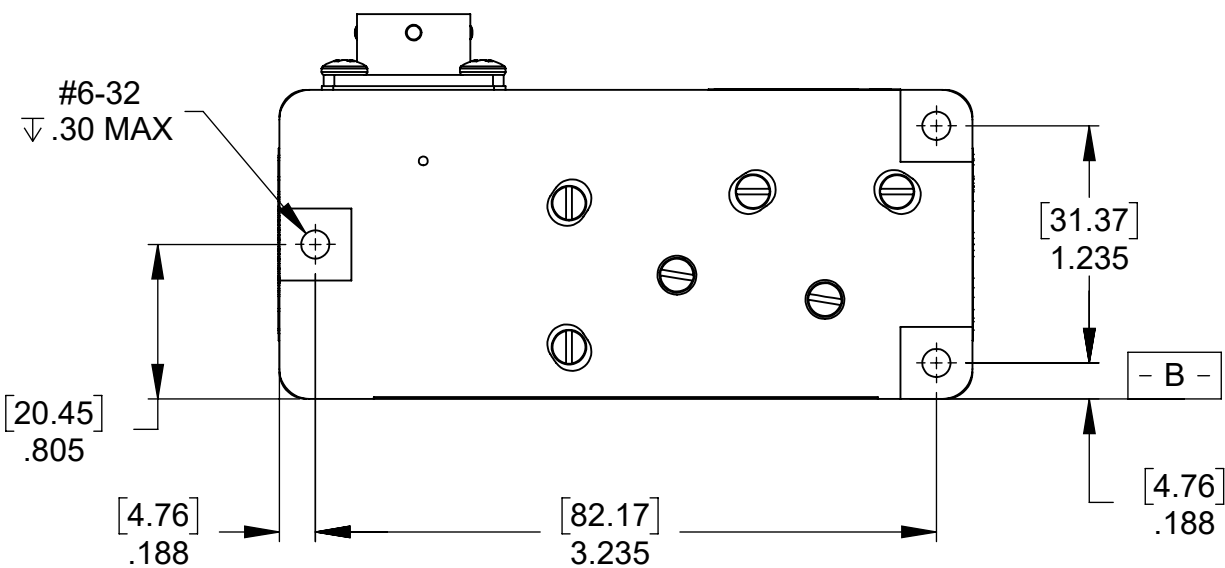
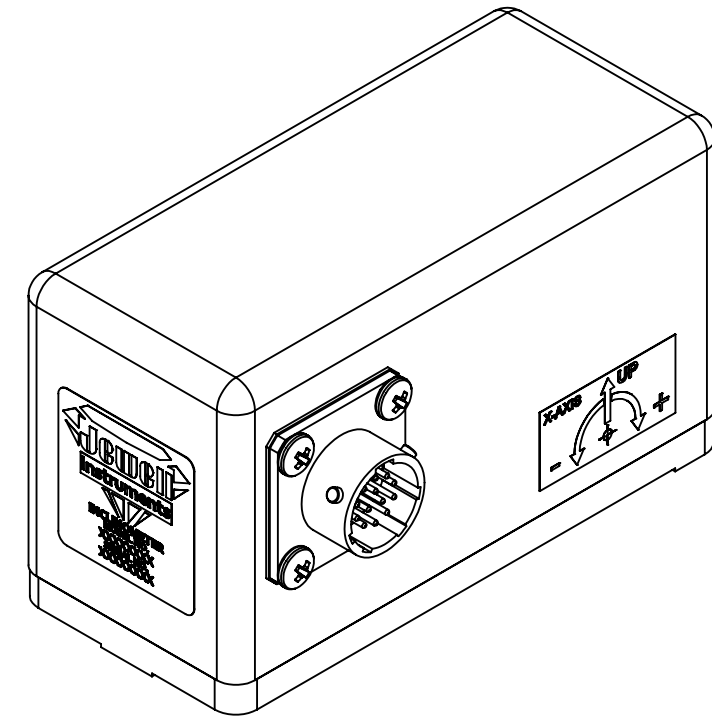
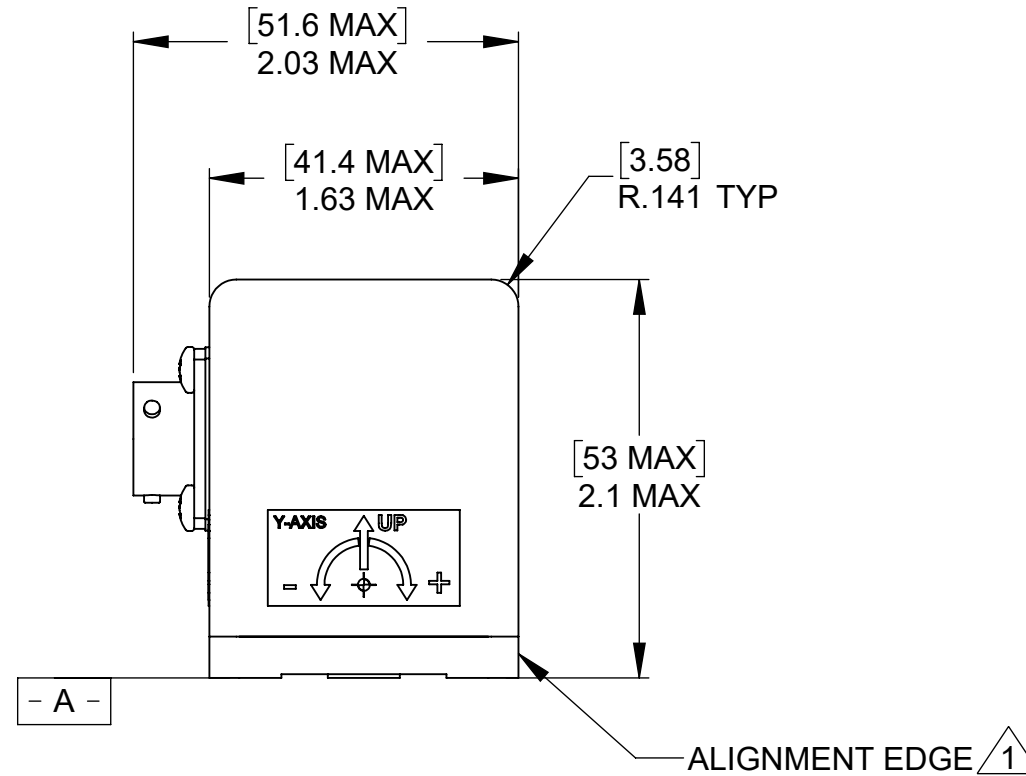


NOTES:

1. ALIGNMENT EDGE SHOULD BE NO HIGHER THAN .19 [4.8] TO AVOID INTERFERENCE WITH COVER.
2. CONNECTOR IS MS27476Y10D35P, MATES WITH MS27473T10B35S.
3. DATUM **- A -** AND **- B -** ARE DEFINED AS REFERENCE SURFACES.
4. DIMENSIONS ARE $\frac{[mm]}{[INCH]}$
5. RoHS COMPLIANT.

REVISIONS				
REV	DESCRIPTION	DATE	ECO	DRFTSMN
1	INITIAL DESIGN	6-1-2020		TAD

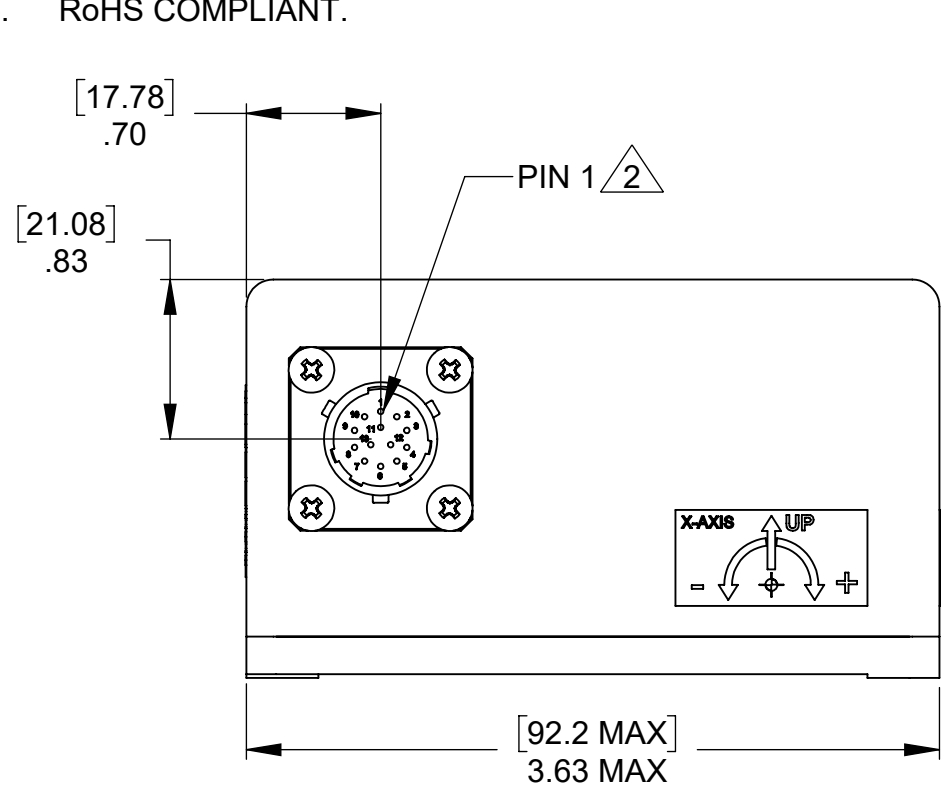

CONNECTOR	
PIN	FUNCTION
1	+20 TO +30 VDC
2	N/C
3	POWER RETURN
4	X-AXIS OUTPUT SIGNAL
5	SIGNAL COMMON
6	Y-AXIS OUTPUT SIGNAL
7	SIGNAL COMMON
8	TEMPERATURE OUT
9	N/C
10	N/C
11	N/C
12	N/C
13	N/C

APPLICATION		DIMENSIONS ARE IN INCHES AND APPLY TO PART BEFORE FINISHING
USED ON	NEXT ASSY	TOLERANCE UNLESS SPECIFIED
		TWO PLACE DECIMALS (.00) ± .01
		THREE PLACE DECIMALS (.000) ± .005
		ANGLES ± 1°
		RAW MATL - COMMERCIAL STANDARD
MATERIAL	DRAWN	DATE
	TAD	6-1-2020
	CHECKER	DATE
FINISH	APPROVED	DATE

Jewell Instruments
MANCHESTER, NH
TRIPLETT MODUTEC A&M EMICO

PROPRIETARY NOTICE
THIS DRAWING IS THE PROPERTY OF JEWELL INSTRUMENTS, LLC. NEITHER THIS DOCUMENT NOR THE DATA CONTAINED HEREIN SHALL BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF JEWELL INSTRUMENTS, LLC. NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED HEREIN. ALL RIGHTS RESERVED.

TITLE		C750-200	
DRAWING NO.		OD98750-200-C	
SCALE		CAGE CODE	REV
1:1		33005	1
SHEET 1 OF 1			