


CONNECTOR PIN OUT	
CONNECTOR	FUNCTION
PIN A	POWER +12 TO +18 VDC
PIN B	POWER/ SIGNAL COMMON
PIN C	RETURN -12 TO -18 VDC
PIN D	OUTPUT SIGNAL (Eo)
PIN E	N/A
PIN F	N/A



- NOTES:
- CONNECTOR: PT02H-10-6P
MATES WITH: PT06A-10-6S (SR)
 - UNITS: [mm]
INCH

APPLICATION		DIMENSIONS ARE IN INCHES AND APPLY TO PART BEFORE FINISHING
USED ON	NEXT ASSY	TOLERANCE UNLESS SPECIFIED
		TWO PLACE DECIMALS (.00) ± .01
		THREE PLACE DECIMALS (.000) ± .005
		ANGLES ± 1°
		RAW MATL - COMMERCIAL STANDARD
MATERIAL		
FINISH		

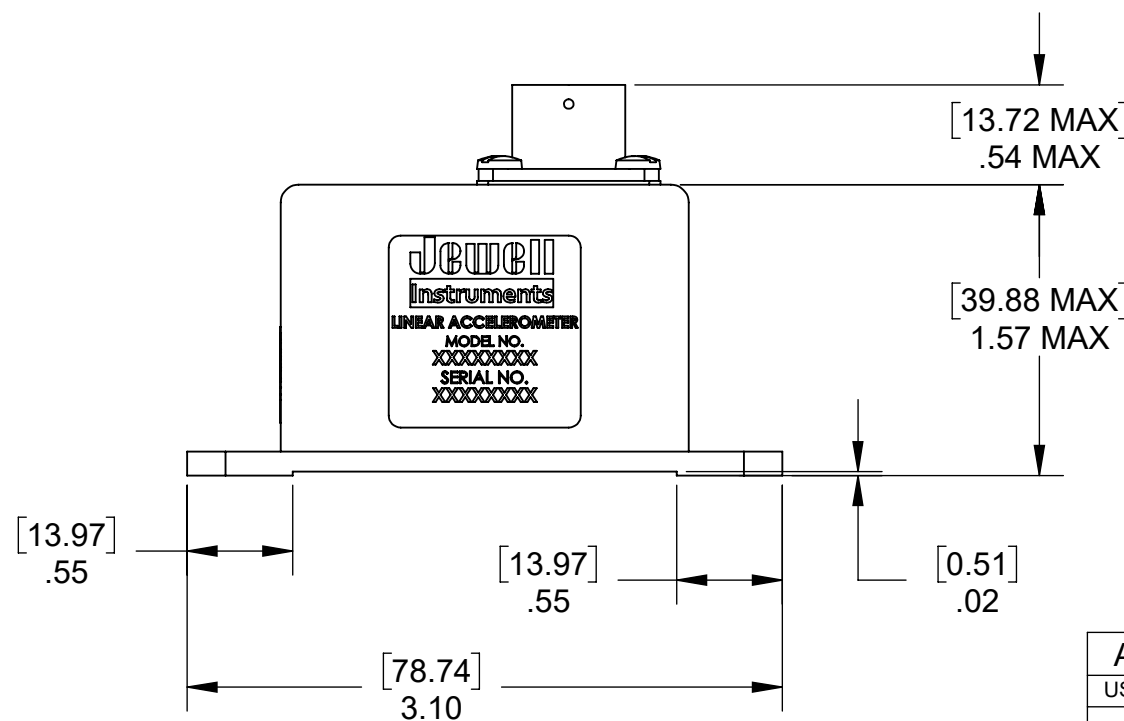

MANCHESTER, NH
TRIPLETT MODUTEC A&M EMICO

PROPRIETARY NOTICE
THIS DRAWING IS THE PROPERTY OF JEWELL INSTRUMENTS, LLC. NEITHER THIS DOCUMENT NOR THE DATA CONTAINED HEREIN SHALL BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF JEWELL INSTRUMENTS, LLC. NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED HEREIN. ALL RIGHTS RESERVED.

TITLE		
SMAC - DUAL SUPPLY EMERALD SERIES		
DRAWING NO.	REV	
OD02550354-000	C	
SCALE	CAGE CODE	SHEET 1 OF 1
1:1	33005	