


CONNECTOR PIN OUT	
CONNECTOR	FUNCTION
PIN A	POWER +15 TO +30 VDC
PIN B	POWER/ SIGNAL COMMON
PIN C	N/A
PIN D	OUTPUT SIGNAL (Eo)
PIN E	N/A
PIN F	N/A

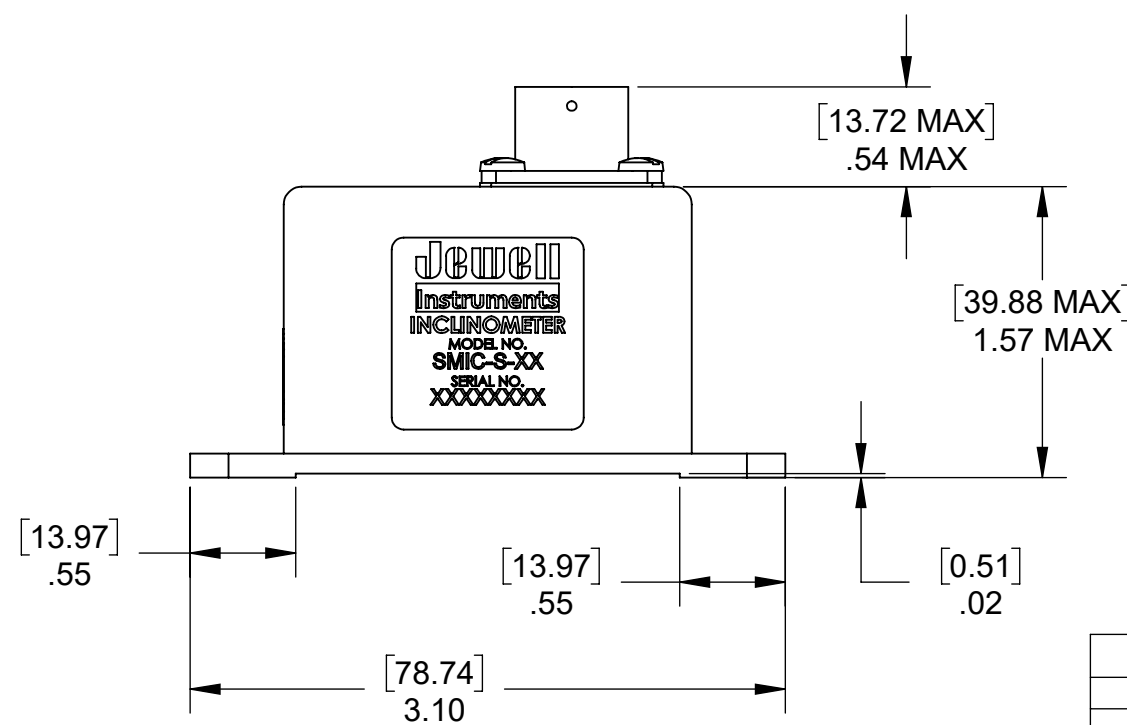

- NOTES:
- CONNECTOR: PT02H-10-6P
MATES WITH: PT06A-10-6S (SR)
 - UNITS: [mm]
INCH

DIMENSIONS ARE IN INCHES AND APPLY TO PART BEFORE FINISHING TOLERANCE UNLESS SPECIFIED TWO PLACE DECIMALS (.00) \pm .01 THREE PLACE DECIMALS (.000) \pm .005 ANGLES \pm 1' RAW MATL - COMMERCIAL STANDARD	<p>MANCHESTER, NH TRIPLETT MODUTEC A&M EMICO</p>	TITLE	
		SMIC - SINGLE SUPPLY EMERALD SERIES	
PROPRIETARY NOTICE THIS DRAWING IS THE PROPERTY OF JEWELL INSTRUMENTS, LLC. NEITHER THIS DOCUMENT NOR THE DATA CONTAINED HEREIN SHALL BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF JEWELL INSTRUMENTS, LLC. NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED HEREIN. ALL RIGHTS RESERVED.	DRAWING NO.	REV	
	OD02550304-000	B	
SCALE	CAGE CODE	SHEET 1 OF 1	
1:1	33005		